

A Learning-based Memetic Algorithm for the Multiple Vehicle Pickup and Delivery Problem with LIFO Loading

Bo Peng^a, Yuan Zhang^a, Zhipeng Lü^{b,*}, T.C.E. Cheng^c, Fred Glover^d

^a*School of Business Administration, Southwestern University of Finance and Economics, Chengdu, 610074, P.R. China*

^b*SMART, School of Computer Science and Technology, Huazhong University of Science and Technology, Wuhan, 430074, P.R. China*

^c*Department of Logistics and Maritime Studies, The Hong Kong Polytechnic University, Hung Hom, Kowloon, Hong Kong*

^d*ECEE, College of Engineering & Applied Science, University of Colorado, Boulder, CO 80309, USA*

Abstract

The multiple vehicle pickup and delivery problem is a generalization of the traveling salesman problem that has many important applications in supply chain logistics. One of the most prominent variants requires the route durations and the capacity of each vehicle to lie within given limits, while performing the loading and unloading operations by a last-in-first-out (LIFO) protocol. We propose a learning-based memetic algorithm to solve this problem that incorporates a hybrid initial solution construction method, a learning-based local search procedure, an effective component-based crossover operator utilizing the concept of structured combinations, and a longest-common-subsequence-based population updating strategy. Experimental results show that our approach is highly effective in terms of both computational efficiency and solution quality in comparison with the current state-of-the-art, improv-

*Corresponding author.

Email addresses: pengbo@swufe.edu.cn (Bo Peng), zhipeng.lv@hust.edu.cn (Zhipeng Lü), Edwin.Cheng@polyu.edu.hk (T.C.E. Cheng)

ing the previous best-known results for 132 out of 158 problem instances, while matching the best-known results for all but three of the remaining instances.

Keywords: pickup and delivery problem; routing; traveling salesman; memetic algorithms; hybrid heuristics; learning mechanisms.

1. Introduction

The travelling salesman problem with pickup and delivery (TSPPD) is a generalization of the well-known traveling salesman problem with many important applications (Pavone (2013), Yu et al. (2016) and Azadian et al. (2017)). TSPPD consists of determining a minimum cost circuit travelled by a vehicle to service several predefined requests to transport items from a specified pickup location to a specified delivery location. The vehicle starts from the depot and returns to it after all the requests have been serviced.

There exist two ways in which the loading and unloading operations corresponding to the pickup and delivery activities, respectively, are performed, namely first-in-first-out (FIFO) and last-in-first-out (LIFO), which correspond to two variants of TSPPD, called TSPPD with LIFO and TSPPD with FIFO. The FIFO policy implies that when a pickup node is visited, its corresponding item is loaded in a linear queue and an item can only be delivered if it is the first item of the queue, while the LIFO policy utilizes the mechanism of stack instead of queue, i.e., an item can be delivered if it is on the top of the stack. Figure 1 depicts the two different policies, in which 0^+ and 0^- represent the depot at the beginning and end of the two routes, and i^+ and i^- represent the pickup and the delivery nodes for item i (and similarly for item j), where Figures 1(a) and 1(b) show the FIFO and LIFO loadings, respectively.

In practice, TSPPD with FIFO exists in many real-life applications such as the dial-a-ride system where the major concern is fairness, i.e., the passen-

gers (such as patients) picked up earlier must be dropped off earlier. Previous contributions to solve this problem include a branch-and-bound algorithm by Carrabs et al. (2007), a branch-and-cut algorithm by Cordeau et al. (2010a) that can solve instances with up to 25 requests, and two effective heuristics based on probabilistic tabu search and iterated local search by Erdoğan et al. (2009). Recently, Lu et al. (2018) proposed a multi-restart iterative search approach based on combined utilization of six move operators to tackle this problem.

On the other hand, TSPPD with LIFO likewise occurs in many applications, such as the transport of bulky, fragile, or hazardous items. Cordeau et al. (2010b) proposed a branch-and-cut algorithm that can solve instances with up to 17 requests, while Li et al. (2011) proposed a variable neighbourhood search heuristic based on a tree representation to improve the previous results in the literature. In general, TSPPD and its variants have been extensively researched in the literature, where the recent studies include Furtado et al. (2017), Montero et al. (2017), Veenstra et al. (2017), Chami et al. (2017) and Naccache et al. (2018).

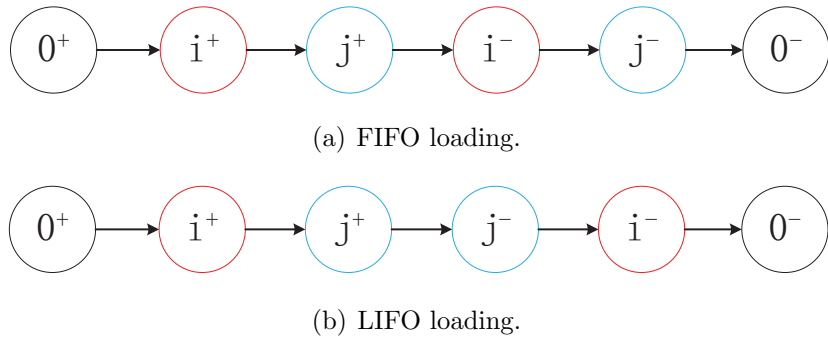


Figure 1: The FIFO and LIFO loadings in the pickup and delivery problem.

In this paper we focus on the pickup and delivery problem under the LIFO policy, utilizing a general framework that can also be applied to address the

problem under the FIFO policy. Specifically, we extend the TSPPD problem to involve multiple vehicles, enabling the single vehicle problem to be handled as a special case.

Over the past decades, several state-of-the-art algorithms have been proposed for solving TSPPD with the multiple vehicle extension. [Cherkesly et al. \(2015\)](#) proposed a population-based metaheuristic to address the multiple vehicle pickup and delivery problem with LIFO loading and time windows, called the MPDPL with time windows. The authors combined local search with a genetic algorithm to produce high-quality solutions within reasonable computing times. [Cheang et al. \(2012\)](#) considered the case where the route length of each vehicle cannot exceed a maximum limit and the vehicles have unlimited capacity, called MPDPL with distance constraints, abbreviated as PDPLD. They proposed a two-stage approach for solving the problem to minimize the total distance and the number of vehicles, employing simulated annealing and ejection pool in the first stage, and variable neighbourhood search and probabilistic tabu search in the second stage. [Benavent et al. \(2015\)](#) addressed MPDPL with distance constraints (PDPLD) as a special case of MPDPL with maximum time (which is called the pickup and delivery problem with limited time, abbreviated as PDPLT), observing that minimizing the total distance is equivalent to minimizing the total time and that minimizing the number of vehicles as the primary objective can be addressed by adding a large number to the travel times of the arcs leaving the depot. However, the exact method of [Benavent et al. \(2015\)](#) can only solve instances with up to 60 nodes, while their proposed tabu search can solve larger instances with up to 400 nodes. This difference between the exact and metaheuristic methods motivates us to employ a metaheuristic approach to tackle large-size instances of the PDPLT problem. The main contributions of our study are as follows:

- A learning-based memetic algorithm (LMA) for solving PDPLT, which

introduces a hybrid initial solution construction method by incorporating the splitting approach and the Lin-Kernighan heuristic (LKH) for the asymmetric travelling salesman problem (ATSP), a subproblem of PDPLT, to generate a random initial population with high quality.

- A reward and punishment mechanism inspired by reinforcement learning to manage the multiple neighbourhood moves and guide the search.
- A component-based crossover operator and a longest-common-subsequence-based (LCS-based) population updating strategy to obtain a better trade-off between intensification and diversification of the search.
- Our experimental results demonstrate that the performance of our LMA is highly effective compared to state-of-the-art approaches in the literature by improving the previous best-known results for 131 out of 158 problem instances (including both PDPLD and PDPLT instances), while matching the best-known results for all but three of the remaining instances.

We organize the rest of the paper as follows: Section 2 introduces the PDPLT problem and Section 3 presents the proposed memetic algorithm for solving PDPLT in detail. Section 4 presents and discusses the proper setting of the key parameters and examine the performance of the proposed algorithm against the current best performing algorithms for both PDPLT and PDPLD. In Section 5 we analyze the main strategic components of our algorithm. Finally, we conclude the paper and suggest topics for future research in Section 6.

2. Problem Description and Definitions

2.1. Problem description

In PDPLT, we are given a set $N = \{1, \dots, n\}$ of n requests, each of which concerns the transport of an item with a load from pickup vertex i^+ to delivery vertex i^- ($1 \leq i \leq n$). There are several vehicles with limited capacity that starts from a depot vertex 0^+ and return to a depot vertex 0^- with the objective of minimizing the total travel time incurred by all the vehicles. The vehicles must fulfill all the requests by visiting each pickup vertex to pick up the indicated load and travel to the corresponding delivery vertex to deliver the load in accordance with the LIFO policy. Specifically, PDPLT is defined on a complete weighted undirected graph $G = (V, E)$ with the following features.

- $V = P \cup D \cup O$ denotes the set of nodes, where $P = \{1^+, 2^+, \dots, n^+\}$ denotes the set of pickup nodes, $D = \{1^-, 2^-, \dots, n^-\}$ is the set of delivery nodes, O denotes the set of starting and ending nodes $\{0^+, 0^-\}$, also called depots, and $E = \{(u, v) : u, v \in V, u \neq v\}$ is the edge set.
- Each item must be picked at $i^+ \in P$ and delivered at $i^- \in D$, where the load of the item is denoted by d_i .
- The service time at each pickup node or delivery node $u \in P \cup D$ is denoted by st_u , and the travel time to traverse the arc $(u, v) \in E$ is denoted by $tt_{u,v}$.
- The maximum capacity of each vehicle is MC .
- The maximum duration of each route including the service time and traversal time is MD .

Let R be one route in a solution S and $R = \{u_0 = 0^+, u_1, u_2, \dots, u_m = 0^-\}$, where u_k is the k th node visited in R ($1 \leq k \leq m$). If the visited node is

a pickup node (i.e., $u_k \in P$), the corresponding load capacity of the vehicle after visiting it is $l(u_k) = l(u_{k-1}) + d_{u_k}$, while the corresponding load of the vehicle after visiting it is equal to $l(u_k) = l(u_{k-1}) - d_{u_k}$ if the visited node is a pickup node (i.e., $u_k \in D$). For each node in the route, the corresponding load cannot exceed the given maximum capacity, i.e., $l(u_k) \leq MC$. We denote by $DT(R) = \sum_{k=0}^{m-1} tt_{u_k, u_{k+1}}$ the total traversal time and $ST(R) = \sum_{k=1}^{m-1} st_k$ the total service time. The corresponding duration of each route including the traversal time and service time cannot exceed the given maximum duration, i.e., $DT(R) + ST(R) \leq MD$. In addition, the LIFO policy is followed for both pickup and delivery operations. A feasible solution to this problem is a set of vehicle routes that satisfy three constraints, i.e., the maximum capacity, maximum duration, and LIFO constraints. The objective is to find a feasible solution with the minimum total travel time as follows:

$$\text{Minimize } f(S) = \sum_{i=1}^{|S|} DT(R_i) + ST(R_i), \quad (1)$$

We refer the reader to (Benavent et al., 2015) for more details of the mathematical formulation of the problem.

2.2. Definitions

A pair consisting of the pickup vertex i^+ and the corresponding delivery vertex i^- is called a *couple*, i.e., request. A *component* is a set of vertices, before the beginning and at the end of which there are no requests being transported by the vehicle. Erdođan et al. (2009) first defined the concept of *component* for FIFO and we extend this concept for both FIFO and LIFO policies in this study. In particular, we introduce a term $\sigma(k)$ to denote the number of uncompleted requests when the k th vertex is visited in a route. If the value of $\sigma(k)$ for the pickup vertex k is equal to 1, then k is the beginning of its component. If the $\sigma(k)$ for the pickup vertex k is equal to 0, then k is the end of its component. Figure 2 is an example in which there

are two components in the route. The vertices in positions 1 and 7 identify the beginnings of the two components as their σ values are equal to 1, i.e., there are no requests transported by the vehicle before visiting these two nodes. The delivery vertices in positions 6 and 10 respectively correspond to the ends of the components as their σ values are equal to 0. There are no requests for the vehicle after serving these two vertices. Hence, the paths from positions 1 to 6 and positions 7 to 10 denote two different components.

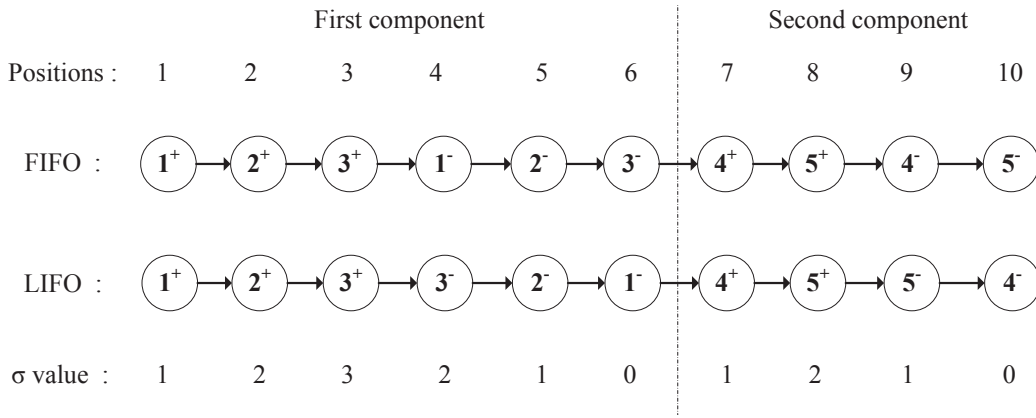


Figure 2: Example of components.

3. Memetic Algorithm

3.1. Main framework

A memetic algorithm is a general-purpose metaheuristic approach that typically combines a local search optimization procedure with a population-based framework, which has been successfully applied to tackle many classical combinatorial optimization problems, including the quadratic assignment problem (Benlic and Hao, 2015), which provides a different generalization of the traveling salesman problem. The purpose of combining local search and population-based strategies is to take advantage of both the crossover operator as a diversification mechanism for discovering promising unexplored re-

gions of the search space and the local optimization as an intensification procedure to obtain high-quality solutions within a search region. We outline our

Algorithm 1 Framework of the memetic algorithm for solving PDPLT

Require: Benchmark instance (B); the maximum computing time (T_{max})
Ensure: Best-found solution (S^*)

```

    /* Generate np feasible solutions as an initial population (Section 3.2) */
1:  $P_c = \{S_1, \dots, S_{np}\} \leftarrow Hybrid\_initial\_solution(B)$ 
    /* Improve each individual  $S_i$  in the population with a learning-based local search (Section 3.3) */
2: for  $i = 1, \dots, np$  do
3:    $S_i \leftarrow Learning\_based\_localsearch(S_i)$ 
4: end for
5: while The maximum computing time  $T_{max}$  is not reached do
6:   Randomly select parent solutions  $S_i$  and  $S_j$  from  $P$  where  $1 \leq i, j \leq np$  and  $i \neq j$ 
    /* Generate offspring  $S_c$  from  $S_i$  and  $S_j$  (Section 3.4) */
7:    $S_c \leftarrow S_i \oplus S_j = Component\_based\_crossover(S_i, S_j)$ 
    /* Improve  $S_c$  with a learning-based local search (Section 3.3) */
8:    $S_c \leftarrow Learning\_based\_localsearch(S_c)$ 
9:   if  $S_c$  is better than  $S^*$  then
10:     $S^* \leftarrow S_c$ 
11:   end if
    /* The longest-common-subsequence based population updating strategy (Section 3.5) */
12:   Determine the worst individual  $S_w$  where the goodness value  $GS(S_w, P_c) = \min\{GS(S_k, P_c)\}$ ,  $1 \leq k \leq np$  (see equation 7)
13:   if  $GS(S_c, P_c \cup S_c) > GS(S_w, P_c \cup S_c)$  then
14:     $P_c \leftarrow P_c \cup S_c \setminus S_w$ 
15:   end if
16: end while
17: return ( $S^*$ )

```

proposed memetic algorithm for PDPLT in Algorithm 1. At the beginning of the algorithm, we iteratively employ a hybrid heuristic method to generate the initial population (line 1). Following this, we employ a learning-based local search to optimize the solutions in the population (lines 2-4). Later, we iteratively combine two parent solutions randomly selected from the population to generate offspring solutions using a component-based crossover operator under the LIFO policy until the stopping criterion, i.e., maximum computing time, is satisfied (lines 5-7). After each use of the crossover opera-

tor, we improve the generated offspring solution using a learning-based local search to guide the search to promising regions (line 8). During this process, S^* records the best solution found so far (lines 9-11). We then apply the longest-common-sequence-based (LCS-based) population updating strategy to possibly replace the worst individual in the population with the improved offspring solution (lines 12-15).

3.2. Hybrid initial solutions

We construct the initial solutions by iteratively using a hybrid initial procedure based on a splitting approach that is able to obtain high-quality initial solutions within short computing time. A similar hybrid initial procedure has been successfully employed to tackle various vehicle routing problems (VRPs), e.g., multi-depot VRP (Escobar et al., 2014) and multi-route VRP (Azi et al., 2014). In order to generate high-quality initial solutions, we first adapt the splitting mechanism for our problem by employing the Lin-Kernighan heuristic (LKH) for the ATSP subproblem in PDPLT to improve the solution quality of the initial solutions. The steps of the construction procedure are presented in Algorithm 2 and can be summarized in the following steps:

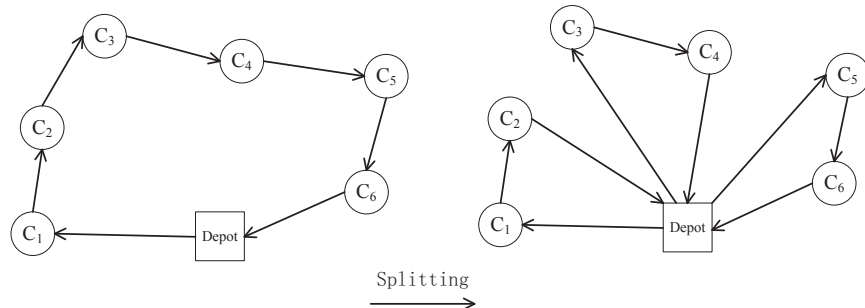


Figure 3: Illustration of the construction mechanism for initial solutions.

- Step 1. Generate a set of components C by randomly setting k ($1 \leq k \leq 3$) couples $\{i_1^+, \dots, i_k^+, i_k^-, \dots, i_1^-\}$ as one component with satisfy-

Algorithm 2 Hybrid initial solution

Require: Benchmark instance (B)

Ensure: The initial solution (S_0)

```
/* Step 1: Generate a set of components by randomly setting  $k$  couples as one component, with
satisfying the maximum capacity constraint*/
1:  $t \leftarrow 0$ 
2: while The request set  $N$  is not empty, i.e.,  $N \neq \emptyset$  do
3:   Construct each component by randomly selecting  $k$  requests (i.e.,  $i_1, \dots, i_k$ ) from the request set
       $N$ , by satisfying the maximum capacity constraint, i.e.,  $\sum_{s=1}^k d_{i_s} \leq MC$ 
4:    $N \leftarrow N \setminus \{i_1, \dots, i_k\}$ 
5:    $t \leftarrow t + 1$ 
6:    $C_t \leftarrow \{i_1^+, \dots, i_k^+, i_k^-, \dots, i_1^-\}$ 
7: end while
/* Step 2: Construct a composite ATSP tour containing all the components generated in Step 1 by
employing the well-known LKH as implemented */
8:  $S \leftarrow \text{LKH\_ATSP}((C_1, C_2, \dots, C_t))$  /*  $t$  denotes the number of components generated in Step 1 */
/* Step 3: Split the composite ATSP tour into several routes with satisfying the maximum duration
constraint */
9:  $R_m \leftarrow 0, m \leftarrow 1$ 
10: for  $i = 1, \dots, t$  do
11:   if  $\text{DT}(R_m \oplus C_i) + \text{ST}(R_m \oplus C_i) \leq \text{MD}$  then
12:      $R_m \leftarrow R_m \oplus C_i$ 
13:   else
14:      $m \leftarrow m + 1$ 
15:      $R_m \leftarrow C_i$ 
16:   end if
17: end for
/* Step 4: Use LKH to optimize each route */
18: for  $i = 1, \dots, m$  do
19:    $\text{LKH\_ATSP}(R_i)$ 
20: end for
21:  $S_0 \leftarrow (R_1, \dots, R_m)$ 
22: return ( $S_0$ )
```

ing both the LIFO constraint and maximum capacity constraint (see lines 1-6 in Algorithm 2). For example, in Figure 3, there exist six components, i.e., C1-C6.

- Step 2. Construct a composite ATSP tour by employing the well-known LKH procedure (Helsgaun, 2000) to optimize all the compo-

nents (C_1, C_2, \dots, C_t) generated in Step 1 (line 8). The reason why we deploy the ATSP model to obtain high-quality route stems from the fact that the traveling time from component C1 to component C2 is not necessarily equal to the traveling time from C2 to C1.

- Step 3. Split the composite ATSP tour into several routes, by iteratively inserting each component C into the current route R if the current route satisfies the maximum duration constraint. Otherwise, we insert it into a new route (lines 9-17). For example, in Figure 3, the route of the whole ATSP tour is split into three routes to satisfy the maximum duration constraint.
- Step 4. For each route R , we obtain an ATSP tour by using LKH to minimize the total travelling cost for visiting the customers belonging to the route (lines 18-21). Finally, the generated solution S_0 is returned as the initial solution (line 22).

The hybrid initial solution construction procedure proposed above is usually able to generate feasible solutions that satisfy the three constraints, i.e., the maximum duration, maximum capacity, and LIFO constraints. In addition, high-quality solutions are generated within reasonable computing times. In Section 5.1 we demonstrate the efficacy of our procedure in comparison with other constructive methods proposed in the literature.

3.3. Learning-based local search

One of the key components of our memetic algorithm is the learning-based local search procedure that plays the critical role of intensifying the search. With the exception of tabu search, traditional local search utilizes a set of moves to search the solution regions without maintaining a memory of the process, while the local search based on our reinforcement learning mechanis-

m is able to effectively exploit memory to manage the neighbourhood moves and guide the search to promising regions.

3.3.1. Neighbourhood moves

Our algorithm employs both intra-route moves (performed in the same route) and inter-route moves (performed between two different routes), as follows:

- Request-Insertion (M_1): A request (e.g., $\{i^+, i^-\}$) is removed from its current route and inserted either in a different position of the same route or in a different route.
- Request-Swap (M_2): Two requests (in the same route or in different routes) exchange their positions.
- Double-Request-Swap (M_3): Two pairs of consecutive requests exchange their positions. This operator extends the Request-Swap move by considering consecutive requests i and j defined to be consecutive if the pickup node j^+ of request j is the closest to pickup node i^+ of request i in the route.
- Component-Insertion (M_4): A component is removed from its current route and inserted either in a different position of the same route or in a different route.
- Component-Swap (M_5): Two components (in the same route or in different routes) exchange their positions.
- Double-Component-Swap (M_6): Two pairs of consecutive components exchange their positions. This operator extends the Component-Swap move by considering two pairs of consecutive components.

In our local search, we only consider neighbourhood moves that can satisfy all the three constraints, i.e., the maximum capacity, maximum duration, and LIFO constraints. Obviously, in cases where the constraints are tight, it is very difficult to find feasible solutions in a single move as confirmed in (Benavent et al., 2015). Hence, the main difference of our approach from that proposed in Benavent et al. (2015), where only the Request-Insertion move is used, is that we employ six different neighbourhood moves to expand the search space in order to find more promising feasible solutions, instead of relaxing the maximum duration constraint and penalizing violations.

3.3.2. Learning mechanism

Reinforcement learning is an area of machine learning concerned with how an agent should take actions in an environment so as to maximize cumulative reward. The intuition underlying reinforcement learning is that actions that lead to large rewards should be made more likely to recur.

We employ a reward and penalty strategy to dynamically manage the neighbourhood moves and guide the search based on the expectation that different neighbourhood moves may be preferable for different problem instances or search landscapes. Consequently, we keep track of a score for each neighbourhood move, which measures how well the move has performed for the current instance or landscape, adopting the perspective that alternating among different moves based on the proposed learning mechanism may yield more robust performance.

To select moves, we assign scores to different moves and use the roulette wheel selection principle. If we have n moves with scores sc_i ($i \in 1, 2, \dots, n$), move k is selected with probability λ_k , where

$$\lambda_k = \frac{sc_k}{\sum_{i=1}^n sc_i}, \quad k = 1, 2, \dots, n. \quad (2)$$

At the beginning of the search, each neighbourhood move has the same

score sc_0 and hence the same probability of being chosen. After each iteration j , the score of the neighbourhood used is updated as follows:

$$sc_{i,j+1} = sc_{i,j} + \alpha * \beta_l, \quad i, j = 1, 2, \dots, n; \quad l = 1, 2. \quad (3)$$

where the reaction factor α controls how quickly the score adjustment function reacts to changes according to the performance of the moves, and parameter β denotes the different incremental scores according to the following several situations. If one move can produce a new best solution, we reward this neighbourhood move by choosing β_1 in Equation 3. If one move can generate a better solution than the current solution, the neighbourhood move would still be rewarded β_2 . However, if the generated solution is worse than the current solution, then we punish the move by multiplying the score by γ as follows:

$$sc_{i,j+1} = \gamma * sc_{i,j}, \quad i, j = 1, 2, \dots, n. \quad (4)$$

The learning-based local search phase proceeds with iterative exploitation of the six neighbourhood moves as shown in Algorithm 3. In each iteration, one neighbourhood move is picked with probability λ_i (lines 3-4). Then, if the neighbourhood solution S' obtained by this neighbourhood move cannot improve the current solution S , the next neighbourhood move is chosen from those remaining; otherwise, the current solution S is replaced by the best neighbourhood solution S' generated by current neighborhood move (lines 5-10). Subsequently, the score of the neighbourhood move N_i is updated by Eqs. 3 and 4 (line 11). During this process, S^b records the best solution found in the local search, S^* preserves the best found solution so far, and *no_improv_iter* denotes the number of iterations without improving the best found solution S^b (lines 12-16). When none of the moves can improve the current best solution, we apply a simple perturbation strategy to achieve a

better trade-off between diversification and intensification of the search (lines 17-19).

Algorithm 3 learning-based local search

Require: Initial current solution(S);
Ensure: Best found solution(S^b) during the search
 /* The set of neighbourhood moves denoted by I including the six neighbourhood moves proposed in Sec. 3.3.1*/
 1: $I = \{M_1, M_2, \dots, M_6\}$, $I_0 \leftarrow I$, $S^b \leftarrow S$, $no_improv_iter \leftarrow 0$
 2: **while** $no_improv_iter < n * \epsilon$ **do**
 3: Calculate the probability λ_i of each neighbourhood move M_i by equation 2
 4: Randomly select one neighbourhood move M_i from I with probability λ_i , where $1 \leq i \leq |I_0|$
 5: Choose the best neighboring solution S' from the set of neighboring solutions generated by M_i move, (i.e., $S' \leftarrow S \oplus M_i$)
 6: **if** S' is not better than S **then**
 7: $I \leftarrow I \setminus \{M_i\}$
 8: **else**
 9: $S \leftarrow S'$, $I \leftarrow I_0$
 10: **end if**
 11: Update the score of the neighbourhood move M_i by equations 3 and 4
 12: **if** S' is better than S^* (or S^b) **then**
 13: S^* (or S^b) $\leftarrow S'$, $no_improv_iter \leftarrow 0$
 14: **else**
 15: $no_improv_iter \leftarrow no_improv_iter + 1$
 16: **end if**
 17: **if** $|I| = 0$ **then**
 18: $S \leftarrow Perturbation(S^b)$, $I \leftarrow I_0$
 19: **end if**
 20: **end while**
 21: **return** (S^b)

To apply the perturbation operator, we randomly delete part of the request nodes (n/ζ) from the current solution and re-insert the deleted request nodes into the partial solution based on a greedy strategy.

3.4. Component-based crossover operator

The crossover operator is another key component of our memetic algorithm. In practice, it is important to devise a dedicated re-combination operator that has strong “semantics” with respect to the studied problem.

In the last few years, several kinds of crossover operator have been used in the literature. [Li et al. \(2011\)](#) introduced a complicated crossover operator based on the tree representation and [Cherkesly et al. \(2015\)](#) proposed an adapted-order-based crossover operator. Both operators can only be used for the LIFO policy and cannot deal with the FIFO constraint. In this study we propose a general crossover operator, which is different from the previous ones as follows: First, our crossover operator always generates feasible solutions with respect to all the constraints, i.e., the LIFO, maximum time, and maximum capacity constraints. Thus, it is unnecessary to employ the repair strategy to ensure feasibility of the generated solutions. Second, based on an iterated greedy construction mechanism, our crossover operator can obtain high-quality offspring solutions.

We design the proposed crossover operator such that the elite components are transferred from the parents to the offspring to a large extent, which follows the general principles underlying the structured combination approach introduced in [Glover \(1994\)](#), and operates in the following two sequential steps:

- Step 1. Generate components: We divide the two selected parents into their corresponding components. To illustrate this, [Figure 4](#) depicts an example with two parents $I^a = \{V_1^a, V_2^a\}$ and $I^b = \{V_1^b, V_2^b\}$, where V_1^a and V_2^a (V_1^b and V_2^b) denote the two routes of solution I^a (I^b). Obviously, there are three components in the two routes for I^a , i.e., $(1^+, 2^+, 2^-, 1^-)$, $(5^+, 5^-)$, and $(3^+, 4^+, 4^-, 3^-)$, while there are only two components for I^b , i.e., $(1^+, 4^+, 5^+, 5^-, 4^-, 1^-)$ and $(2^+, 3^+, 3^-, 2^-)$.
- Step 2. Iterated greedy construction based on components: For each route, components are added sequentially according to a best saving criterion. The candidate insertion position of each component is either before or after one component expected for being inserted into one

new route. After each insertion, it is necessary to remove the same couple of the inserted component from the other parent in order to avoid redundancy. The best insertion position of each component cp in the route is the one yielding the minimum value of f' :

$$f' = \Delta(f)/\theta, \quad (5)$$

where $\Delta(f)$ represents the incremental objective value after inserting component cp in the route and θ denotes the number of couples in component cp . As shown in Figure 4, we insert component $(1^+, 2^+, 2^-, 1^-)$ into route V_1^c and remove two couples $(1^+, 1^-)$ and $(2^+, 2^-)$ from I^a and I^b . Then, we insert the next component $(3^+, 3^-)$ with the best value f' into route V_1^c . Note that if all the cases for which one of the remaining components is inserted into route V_1^c will violate the maximum time constraint, then the selected component $(4^+, 5^+, 5^-, 4^-)$ will constitute one new route V_2^c .

3.5. LCS-based population updating strategy

To maintain healthy diversity of the population, we use the LCS-based population updating strategy introduced by Cheng et al. (2016) to solve the job shop scheduling problem, to decide whether the improved solution should be inserted into the population or discarded. This population updating strategy simultaneously considers the solution quality and the distances among the individuals in the population to guarantee diversity of the population. The underlying idea is that the similarity of two solutions based on the longest common subsequence could clearly match the neighbourhood moves based on the insert and swap operations. For this purpose, we first make two definitions as follows:

Definition 1 (Distance between a solution and its population).

Given a solution S_i and the population $PP = \{S_1, S_2, \dots, S_{np}\}$, the distance

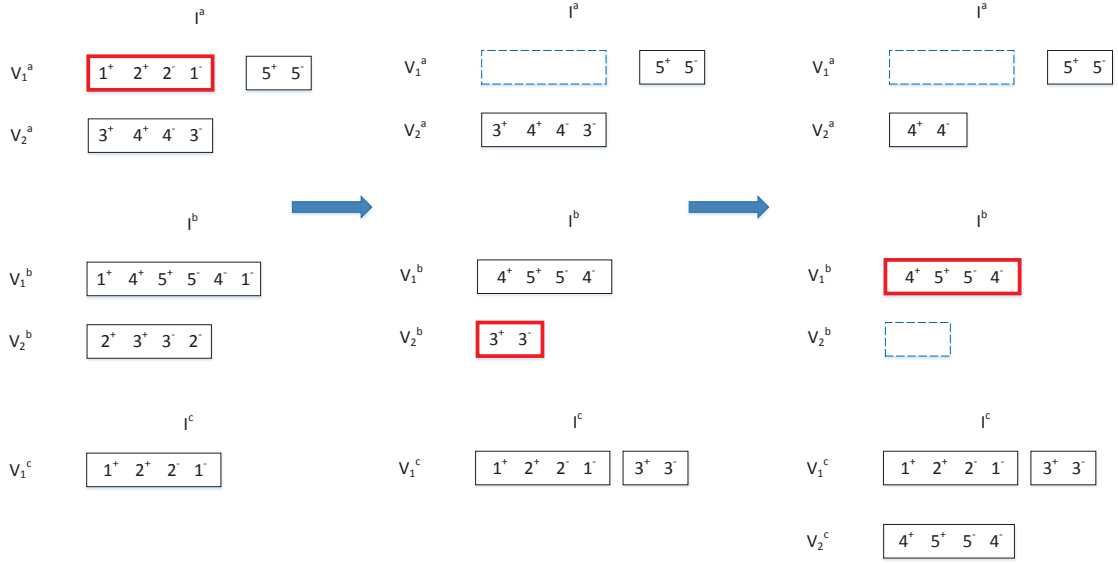


Figure 4: Illustration of the crossover operator with respect to the LIFO policy.

$Dist_{PP}(S_i)$ between the solution S_i and its population PP can be defined as follows:

$$Dist(S_i) = Min\{2 * n - lcs(S_i, S_j) : 1 \leq i, j \leq np, i \neq j\}, \quad (6)$$

where $2 * n$ and $lcs(S_i, S_j)$ denote the number of all the pickup and delivery nodes and the length of the longest common subsequence between S_i and S_j , respectively.

Definition 2 (Goodness score of a solution in the population).

The goodness score $GS(S_i)$ of a solution S_i is defined by its objective function value, as well as its distance to the population, as follows:

$$GS(S_i) = \delta \times \frac{f_{max} - f_{S_i}}{f_{max} - f_{min} + 1} + (1 - \delta) \times \frac{Dist(S_i) - Dist_{min}}{Dist_{max} - Dist_{min} + 1}, \quad (7)$$

where f_{max} and f_{min} denote the maximum and minimum objective values of the individuals in the population PP , and $Dist_{max}$ and $Dist_{min}$ are the

maximum and minimum distances between a solution to the population, respectively. The number 1 is used to avoid the possibility of a 0 denominator and δ is a constant parameter.

In each generation, the offspring individual is inserted into the population if the goodness score of the offspring is better than the worst solution in the population according to the goodness score. Otherwise, the offspring individual is discarded. It is clear that the greater the goodness score $GS(S_i)$ is, the better is the solution S_i . It is noted that this goodness score function simultaneously considers the factors of solution quality and population diversity. On the one hand, we should maintain a population of elite solutions. On the other hand, we have to emphasize the importance of the diversity of the solutions to avoid premature convergence of the population.

4. Computational Studies

In this section we report extensive computational studies conducted to assess the performance of the proposed learning-based memetic algorithm (LMA) with the state-of-the-art reference algorithms in solving public benchmark instances of both PDPLD and PDPLT. Note that PDPLD is a special case of PDPLT where the latter simply considers very high vehicle capacity and ignores the service times in the request nodes.

4.1. Benchmark instances and experimental protocols

For experimental evaluations, we use two data sets in [Benavent et al. \(2015\)](#) and [Cheang et al. \(2012\)](#). The first set of benchmark instances was first proposed in [Li and Lim \(2003\)](#) for the pickup and delivery problem with time windows (PDPTW), which consists of six classes of instances, namely lc1, lc2, lr1, lr2, lrc1, and lrc2, where the nodes in the lc instances are in clusters, in the lr instances are randomly distributed, and in the lrc instances are partially clustered and partially randomly distributed. [Benavent et al.](#)

(2015) modified these original instances to match the new problem PDPLT by setting the maximum route duration equal to the width of the time window associated with the depot and ignoring all the other time windows. Hence, in our computational studies, we used the same benchmark instances as those used in Benavent et al. (2015). The instances can be divided into two subsets of 116 instances, including 56 small-size instances with 100-110 request nodes and 60 large-size instances with 402-422 request nodes.

The second set of benchmark instances was used in Cheang et al. (2012) for PDPLD. Since PDPLD is a special case of PDPLT, we compare our learning algorithm LMA with the reference algorithms in the literature by setting a very high vehicle capacity limit for each vehicle and ignoring the service time in each request vertex. These instances were derived from the six TSP instances fn14461, brd14051, d15112, d18512, nrw1379, and pr1002 extracted from TSPLIB (Reinelt, 1991). For each of these TSP instances, subsets of vertices were selected with 25, 51, 75, 101, 251, 501, and 751 vertices. In addition, we imposed a travel distance limit d_{max} on each instance, where $d_{max} = \max\{d(0^+, i^+) + d(i^+, i^-) + d(i^-, 0^-)\}$ ($i \in r$), which is the largest distance for any route involving a single request. All the benchmark instances are publicly available on the website¹, as well as the executable files of our LMA method.

In this study we coded our LMA algorithm in C++ and ran it on a PC with a AMD Athlon 3.0GHz CPU and 2Gb RAM operating under the Windows 7 operating system. To evaluate the performance of LMA, we compare it with the following state-of-the-art heuristics from the literature:

- The multi-start iterated tabu search (MS-ITS) for PDPLT proposed by Benavent et al. (2015), who implemented it on a 2.66 GHz Core 2Quad processor with 3Gb RAM under the Windows XP operating system.

¹<https://github.com/283224262/PDPLT>

- Eight heuristics including a Variable Neighbourhood Search (VNS) algorithm, six reduced versions of the VNS heuristic, and the Probabilistic Tabu Search (PTS) algorithm for PDPLD proposed in [Cheang et al. \(2012\)](#), who tested their performance on a Dell server with an Intel Xeon E5520 2.26 GHz CPU and 8 GB RAM operating under the Linux operating system. The computing times reported are in CPU seconds on this server.

In order to achieve relatively fair comparisons, we apply the method proposed in [Chen et al. \(2016\)](#) to scale the computing times reported for the mentioned heuristics in the corresponding studies. The procedure is based on the assumption that the CPU speed is approximately linearly proportional to the CPU frequency. Specifically, we performed ten independent runs of our LMA for each instance, with the maximum time limit per run set to equal the scaled CPU times by multiplying the computing time reported by the current best-performing algorithms from [Benavent et al. \(2015\)](#) and [Cheang et al. \(2012\)](#) with the ratio values $(2.66/3.0)$ and $(2.26/3.0)$, respectively.

4.2. Parameter tuning and parameter sensitivity analysis

Table 1 presents the settings of the LMA parameters used in the reported experiments. We tuned the parameters $(\alpha, \beta_1, \beta_2, \gamma, \zeta, np, \epsilon, \text{ and } \delta)$ with the Iterated F-race (IFR) proposed by [Birattari et al. \(2010\)](#) and an automated configure method that is part of the IRACE package from [Lopez-Ibanez et al. \(2016\)](#). We performed the tuning process on instances LC1, LR1, LRC1, brd14051, d15112, d18512, fnl4461, nrw1379, and pr1002 with 402-440, 501, and 751 vertices. For each parameter, IFR requires a limited set of values as input to choose from the “candidate values” which are empirically determined and presented in Table 1. We set the total time budget for IRACE to 1,000 executions of LMA, with a time limit of 400 seconds for the PDPLT instances LC1, LR1, and LRC1, and 3,000 seconds for the PDPLD instances brd14051,

d15112, d18512, fnl4461, nrw1379, and pr1002. We denote the parameters setting suggested by IFR as *Final value* in Table 1.


To evaluate the sensitivity of each parameter, we performed a further tuning study on these representative medium and large instances. For each running, we evaluated each candidate value from Table 1 by fixing the remaining parameters to the corresponding values. We performed ten independent runs for each instance. We present the distribution and range of the average results for each parameter in a box-and-whisker plot in Figure 5. In order to determine whether there exist statistically significant differences in the solution samples for different values of each candidate parameter, we conducted the the Friedman rank sum test. We report the corresponding p -values in Figure 5. The Friedman test reveals statistically significant differences in performance for parameters α (p -value = 0.0033), β_1 (p -value = 0.0451), β_2 (p -value = 0.0472), γ (p -value = 0.0005), ζ (p -value = 0.0306), and δ (p -value = 0.0247), while the remaining parameters do not exhibit significant differences. From the plots in Figure 5, we further observe that the best-performing parameter values are almost the same as the best parameter values reported by IFR.

Table 1: Settings of some important parameters for LMA.


Parameter	Description	Candidate values	Final value
α	The reaction factor that controls how quickly the score adjustment function reacts to changes according to the performance of the moves	0.1 , 0.2 , 0.3	0.1
β_1	The reward parameter if a move produces a new best solution	1, 5, 10	5
β_2	The reward parameter if a move improves the current solution	1 , 2 , 5	1
γ	The punishment parameter if a generated solution is worse than the current solution	0.8, 0.9, 0.99	0.9
ζ	The parameter of the ratio of the number of request nodes deleted in the perturbation strategy (n/ζ)	2,4,6	4
ϵ	The threshold used to employ the dedicated perturbation ($n*\epsilon$)	1 , 5, 10	5
np	The number of individuals in the population	10, 20 , 30	10
δ	The constant parameter to balance the objective value and the distance in the goodness value	0.5, 0.7 , 0.9	0.7

4.3. Computational results on the tested benchmark instances


In this section we evaluate the performance of LMA in solving PDPLT in comparison with the best-performing algorithm MS-ITS proposed by Be-




(a) α : p -value = 0.0033




(b) β_1 : p -value = 0.0451




(c) β_2 : p -value = 0.0472

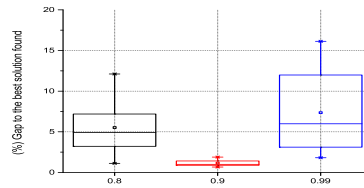


(d) γ : p -value = 0.0005




(e) ζ : p -value = 0.0306

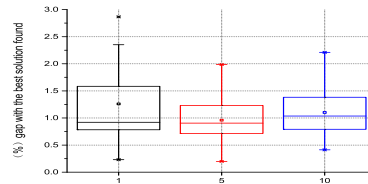

(f) ϵ : p -value = 0.0672

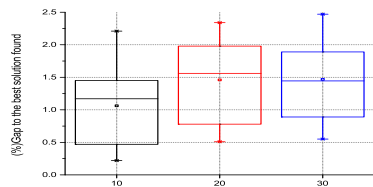

(g) np : p -value = 0.4966



(h) δ : p -value = 0.0247

Figure 5: Box-and-whisker plots of the gaps between the objective values and the best found solutions for the considered parameters.

navent et al. (2015). Specifically, we applied LMA to solve each instance for ten times, terminating each run when the time reached the maximum time of 400 seconds. As depicted in Tables 2 and 3, the columns f_{best} , Veh, f_{avg} , and Time report the best objective value, i.e., the minimum travelled duration, the number of vehicles corresponding to the best solution, the average objective value over the ten runs, and the computing time, respectively. In addition, the rows $\#best$, $\#equal$, and $\#worse$ indicate respectively the numbers of instances for which the associated algorithm obtains better, equal, or worse objective values in terms of f_{best} compared with the reference results reported in the literature, and the row avg denotes the average value over all the instances in the set.

Table 2: Results for solving public benchmark PDPLT instances with 100-110 nodes.

Instances	MS-ITS			LMA				Instances	MS-ITS			LMA			
	f_{best}	Veh	Time	f_{best}	Veh	f_{avg}	Time		f_{best}	Veh	Time	f_{best}	Veh	f_{avg}	Time
lc101	9867.61	10	65.91	9867.29	9	9868.01	16.31	lc201	9825.64	3	125.00	9824.76	3	9825.73	28.75
lc102	9862.70	9	59.19	9862.70	9	9862.70	27.87	lc202	9860.47	3	115.66	9860.24	3	9861.17	16.07
lc103	9867.84	9	56.47	9867.84	9	9867.98	10.69	lc203	9873.71	3	107.53	9873.71	3	9874.13	17.30
lc104	9857.95	10	62.22	9857.80	9	9857.95	41.32	lc204	9832.31	3	121.44	9830.38	3	9831.28	16.94
lc105	9848.78	9	54.31	9848.01	9	9848.83	4.94	lc205	9794.84	3	103.66	9794.84	3	9794.84	15.84
lc106	9866.18	9	60.28	9866.18	9	9866.18	10.71	lc206	9882.15	3	116.55	9882.15	3	9882.15	17.49
lc107	9874.48	9	62.25	9874.48	9	9876.24	33.08	lc207	9802.90	3	98.61	9802.90	3	9802.90	16.25
lc108	9862.42	9	60.89	9862.42	9	9863.11	48.03	lc208	9803.00	3	99.86	9803.00	3	9803.00	15.31
lc109	9855.31	9	52.73	9855.31	9	9855.32	22.76								
lr101	2140.15	11	61.36	2110.53	10	2120.47	33.78	lr201	1967.24	3	188.69	1948.63	2	1955.15	16.49
lr102	2125.61	10	62.24	2114.12	10	2126.19	13.96	lr202	2130.35	3	188.00	2124.35	3	2129.76	10.86
lr103	2113.11	10	49.53	2111.05	10	2113.66	38.62	lr203	2102.09	3	208.83	2100.92	3	2101.99	18.68
lr104	2072.80	10	47.72	2064.99	10	2076.81	46.35	lr204	2184.12	3	189.06	2179.69	3	2185.68	12.80
lr105	2114.97	10	51.80	2109.91	10	2110.01	11.52	lr205	2079.14	3	202.53	2065.66	3	2085.43	23.56
lr106	2147.80	10	58.52	2126.12	10	2139.85	38.58	lr206	2111.64	3	168.78	2110.17	3	2111.32	19.20
lr107	2188.71	11	52.13	2173.23	10	2193.84	11.41	lr207	2146.86	3	188.17	2144.38	3	2148.59	75.53
lr108	2150.33	10	45.59	2148.11	10	2151.92	39.51	lr208	2090.03	3	170.94	2082.15	3	2093.70	16.28
lr109	2165.48	11	60.38	2154.84	10	2163.55	45.93	lr209	2066.29	3	211.49	2045.65	3	2058.91	21.55
lr110	2041.50	10	54.05	2041.50	10	2042.16	42.09	lr210	2073.73	3	193.95	2068.44	3	2070.08	97.72
lr111	2114.81	10	60.55	2110.61	10	2115.86	21.61	lr211	2027.38	3	216.20	2027.38	3	2027.98	16.87
lr112	2102.96	10	53.89	2098.09	10	2100.47	19.24								
lrc101	2289.98	10	50.88	2265.37	10	2287.39	18.55	lrc201	2203.00	3	161.02	2168.34	3	2187.96	17.20
lrc102	2336.21	10	48.58	2331.00	10	2340.18	14.82	lrc202	2250.50	3	158.69	2204.66	3	2235.81	38.47
lrc103	2213.32	11	61.28	2195.80	10	2207.54	26.77	lrc203	2192.66	3	157.36	2174.51	3	2189.39	50.17
lrc104	2191.28	10	57.22	2190.22	10	2198.88	35.40	lrc204	2018.41	3	158.92	2018.41	3	2019.13	16.05
lrc105	2335.36	11	60.52	2305.44	10	2321.17	25.32	lrc205	2261.11	3	171.17	2225.98	3	2249.28	18.26
lrc106	2238.28	10	57.77	2226.83	10	2237.95	17.59	lrc206	2281.59	3	145.84	2263.27	3	2279.38	10.88
lrc107	2218.77	10	50.31	2204.83	10	2220.36	43.51	lrc207	2426.00	4	169.05	2366.94	3	2388.16	14.88
lrc108	2201.42	10	51.73	2201.10	10	2202.11	19.21	lrc208	2176.96	3	154.55	2104.36	3	2149.66	18.86
avg	4560.90	9.93	56.22	4553.30	9.69	4559.89	26.88		4424.60	3.04	158.95	4410.96	2.96	4420.09	24.38
$\#better$						22									21
$\#equal$						7									6
$\#worse$						0									0

From Table 2, we observe that LMA outperforms the reference algorithm MS-ITS in terms of f_{best} , Veh, and Time. In particular, LMA achieves better results than the current best-performing algorithm MS-ITS in terms of obtaining the best objective value for 43 out of the 56 instances, while matching the current best-known results for the remaining 13 instances. Moreover, LMA is able to obtain the best objective value within a very short time, which is several times faster than the reference algorithm MS-ITS for the tested instances, i.e., MS-ITS’s 56.22 and 158.95 versus LMA’s 26.88 and 24.38.

Table 3: Results for solving public benchmark PDPLT instances with 402-422 nodes.

Instances	MS-ITS			LMA				Instances	MS-ITS			LMA			
	f_{best}	Veh	Time	f_{best}	Veh	f_{avg}	Time		Best	Veh	Time	f_{best}	Veh	f_{avg}	Time
LC1.4.1	42336.75	30	405.08	42337.43	30	42340.19	307.99	LC2.4.1	40714.04	12	732.05	40670.71	12	40691.66	210.03
LC1.4.2	42366.74	30	382.77	42346.62	30	42410.56	357.37	LC2.4.2	41140.66	14	737.39	40866.52	12	40919.77	394.92
LC1.4.3	42599.50	30	402.63	42569.57	30	42578.89	386.35	LC2.4.3	41316.85	13	741.09	41014.62	12	41210.58	278.97
LC1.4.4	42482.09	30	417.38	42402.31	30	42456.06	355.22	LC2.4.4	41035.84	13	764.05	40870.53	12	40981.32	324.30
LC1.4.5	42312.18	30	395.00	42213.65	30	42289.31	358.27	LC2.4.5	40996.57	13	772.70	40735.31	12	40810.29	297.03
LC1.4.6	42284.78	29	437.97	42271.70	30	42299.72	388.61	LC2.4.6	40727.48	12	744.81	40594.96	12	40661.76	223.93
LC1.4.7	42257.38	30	391.61	42163.86	30	42231.43	303.67	LC2.4.7	41001.45	13	752.27	40687.18	12	40883.25	385.95
LC1.4.8	42409.92	30	400.83	42381.73	30	42399.15	385.35	LC2.4.8	40925.04	13	737.17	40667.13	12	40760.51	247.25
LC1.4.9	42657.31	30	377.06	42645.50	30	42660.04	371.78	LC2.4.9	40810.30	13	788.56	40745.74	12	40781.96	275.21
LC1.4.10	42539.79	30	406.77	42524.90	30	42539.11	376.14	LC2.4.10	41060.15	14	735.99	40873.01	13	40987.03	366.40
LR1.4.1	10502.64	18	840.63	9851.86	14	9917.68	274.60	LR2.4.1	12095.03	7	1598.11	11186.32	4	11199.84	231.22
LR1.4.2	10624.45	18	827.59	9845.99	14	9941.57	272.03	LR2.4.2	12087.73	10	1528.31	11126.38	4	11564.79	351.06
LR1.4.3	10515.92	18	805.61	9784.51	14	9856.29	284.36	LR2.4.3	11890.15	7	1578.91	10876.17	4	11239.41	314.20
LR1.4.4	9910.92	17	850.89	9147.95	14	9403.33	399.28	LR2.4.4	11445.21	10	1612.69	10371.95	4	10685.31	296.48
LR1.4.5	10190.46	16	762.41	9602.53	13	9820.47	374.79	LR2.4.5	11753.71	6	1622.72	11076.18	6	11542.49	399.52
LR1.4.6	10414.40	16	829.00	9952.60	14	10231.68	396.33	LR2.4.6	11549.06	6	1540.38	10666.13	4	10869.72	155.28
LR1.4.7	10321.30	20	851.63	9495.14	13	9853.49	298.65	LR2.4.7	11454.11	8	1658.30	10383.31	4	10534.97	398.30
LR1.4.8	9290.86	15	856.17	8922.60	12	9127.58	393.68	LR2.4.8	11684.98	6	1472.44	10688.82	5	10898.28	162.62
LR1.4.9	10447.86	18	827.13	9801.38	13	9910.65	373.73	LR2.4.9	11695.28	9	1574.20	10786.47	4	11349.26	136.39
LR1.4.10	10041.44	17	848.27	9417.07	13	9823.10	316.42	LR2.4.10	12228.19	8	1589.20	11064.19	4	11901.38	159.49
LRC1.4.1	9700.01	17	818.39	9178.79	14	9320.28	389.15	LRC2.4.1	10733.52	6	1617.91	9656.87	4	9810.79	349.17
LRC1.4.2	9651.76	16	838.09	8871.73	13	8913.31	305.77	LRC2.4.2	10444.30	5	1670.25	9515.38	4	9882.12	277.20
LRC1.4.3	9667.97	16	759.05	9220.59	14	9513.77	389.64	LRC2.4.3	10704.17	7	1577.23	9673.14	4	10106.65	361.75
LRC1.4.4	9015.70	14	772.53	8823.12	13	8948.09	399.86	LRC2.4.4	10857.97	12	1489.13	9477.39	5	9811.89	368.64
LRC1.4.5	9555.94	16	791.08	8879.86	13	9135.54	292.87	LRC2.4.5	10288.07	7	1612.36	9484.97	4	9879.17	256.31
LRC1.4.6	9363.88	17	814.67	9023.08	14	9136.72	365.37	LRC2.4.6	10596.35	10	1638.67	9275.77	4	9513.30	292.73
LRC1.4.7	9645.08	18	870.91	8828.10	13	9132.86	362.44	LRC2.4.7	11160.72	7	1551.36	9861.02	4	10391.22	385.31
LRC1.4.8	9528.92	16	829.53	8855.54	13	9111.02	386.94	LRC2.4.8	10882.58	11	1478.17	9441.73	4	9689.08	358.19
LRC1.4.9	9634.73	17	837.19	8949.42	13	9095.33	189.92	LRC2.4.9	11054.00	7	1578.86	9668.99	4	9910.38	206.83
LRC1.4.10	9639.88	16	838.55	8975.52	13	9110.15	398.25	LRC2.4.10	10855.83	7	1590.75	9786.51	4	10213.11	389.08
avg	20730.35	21.17	682.89	20306.15	18.90	20450.25	348.83		21172.98	9.53	1302.87	20393.11	6.83	20656.04	295.13
#better				30								30			
#equal				0								0			
#worse				0								0			

To further compare the performance of LMA and the reference algorithm MS-ITS, we applied them to solve the large-size instances with 402-422 nodes.

Table 3 presents the results in detail. It is evident that LMA is able to obtain better results in terms of both the best objective value and computing time for all tested instances. Furthermore, in terms of the number of vehicles corresponding to the best objective value, LMA usually outperforms MS-ITS for the tested instances, i.e., MS-ITS’s 21.17 and 18.9 versus LMA’s 9.53 and 6.83.

Table 4: Performance comparisons among VNS, PTS, and LMA for solving PDPLD instances.

Instance	Size	BKS		VNS			PTS			LMA					
		f_{best}	Veh	f_{avg}	Gap(%)	Time	f_{avg}	Gap(%)	Time	f_{best}	Gap(%)	Veh	f_{avg}	Gap(%)	Time
brd14051	25	5086	2	5086.0	0	1.62	5087.2	0.02	0.54	5084	-0.04	2	5084	-0.04	0.41
	51	9352	2	9352.0	0	7.27	9438.7	0.93	2.96	9354	0.02	2	9355.4	0.04	2.71
	75	8543	2	8543.4	0	19.05	8544.8	0.02	6.84	8544	0.01	2	8544.2	0.01	2.48
	101	11,169	2	11,169.0	0	21.31	11,169.0	0	6.42	11,156	-0.12	2	11246.7	0.7	4.81
	251	27,195	8	28,196.1	3.68	172.9	28,730.2	5.65	119.51	26,690	-1.86	5	27372.6	0.65	89.89
	501	58,028	8	59,090.0	1.83	965.21	60,699.8	4.6	907.25	57,419	-1.05	8	57810.2	-0.38	330.32
	751	96,068	12	96,421.5	0.37	1345.17	97,976.6	1.99	4559.2	95,167	-0.94	13	95597.1	-0.49	471.86
d151112	25	108,207	2	108,207.0	0	1.45	108,439.0	0.21	0.31	108,208	0	2	108211.3	0	1.09
	51	178,863	3	179,086.0	0.12	5.29	179,859.0	0.56	1.13	178,866	0	3	178866.5	0	2.33
	75	239,511	4	244,600.7	2.13	13.82	251,313.9	4.93	3.71	239,516	0	4	239516.1	0	8.29
	101	325,761	5	339,504.3	4.22	14.19	346,055.0	6.23	5.28	325,761	0	5	325761.3	0	4.22
	251	700,366	10	720,770.3	2.91	98.15	727,627.5	3.89	200.22	697,292	-0.44	10	703117.9	0.39	65.85
	501	1,145,838	16	1,165,275.3	1.7	252.73	1,188,016.3	3.68	663.22	1,143,485	-0.21	17	1145970	0.01	330.32
	751	1,596,048	22	1,622,964.0	1.69	1036.52	1,637,573.1	2.6	1765.95	1,587,880	-0.51	22	1600147.6	0.26	979.01
d18512	25	5086	2	5086.0	0	1.63	5087.2	0.02	0.54	5084	-0.04	2	5084	-0.04	1.38
	51	9245	2	9256.8	0.13	6.67	9286.0	0.44	1.17	9250	0.05	2	9250.1	0.06	2.72
	75	10,147	2	10,148.8	0.02	16.85	10,180.7	0.33	8.41	10,146	-0.01	2	10146	-0.01	2.92
	101	11,742	2	11,765.6	0.2	31.13	11,909.0	1.42	6.24	11,614	-1.09	2	11747.2	0.04	18.53
	251	27,945	5	28,933.5	3.54	229.93	29,314.2	4.9	206.38	27,757	-0.67	5	28757.9	2.91	204.08
	501	56,790	8	57,787.4	1.76	733.32	58,928.0	3.76	1241.01	56,575	-0.38	8	58109.2	2.32	528.32
	751	91,670	11	94,016.2	2.56	2346.58	95,612.5	4.3	3765.94	90,801	-0.95	12	91862.9	0.21	2970.85
fnl4461	25	2168	1	2168.0	0	2.35	2168.0	0	0.40	2170	0.09	2	2170	0	0.21
	51	4830	2	4830.0	0	4.68	4830.0	0	1.11	4832	0.04	2	4832	0	2.49
	75	7399	3	7432.2	0.45	15.83	7466.5	0.91	8.22	7406	0.09	2	7406	0.09	6.19
	101	10,608	4	10,765.3	1.48	18.29	10,897.8	2.73	7.32	10,604	-0.04	4	10615.9	0.07	13.68
	251	30,651	4	31,334.1	2.23	255.07	31,782.4	3.69	210.30	30,546	-0.34	4	30842.9	0.63	39.84
	501	81,994	7	83,246.3	1.53	667.54	85,081.8	3.77	1596.72	81,454	-0.66	7	81702.6	-0.36	478.17
	751	135,940	12	138,626.0	1.98	2163.77	139,106.8	2.33	3172.93	135,592	-0.26	12	138392.2	1.8	1908.04
nrw1379	25	3464	2	3464.0	0	2.00	3466.1	0.06	0.58	3465	0.03	2	3465	0	0.22
	51	5398	2	5423.4	0.47	8.71	5499.3	1.88	2.43	5397	-0.02	2	5397	0	2.74
	75	8207	3	8352.2	1.77	20.23	8403.4	2.39	11.84	8219	0.15	3	8220.5	0.16	11.66
	101	11,933	4	12,220.9	2.41	33.06	12,537.3	5.06	18.82	11,733	-1.68	4	11989.7	0.48	23.78
	251	31,075	7	31,635.0	1.8	96.03	32,217.6	3.68	186.17	30,957	-0.38	7	31348.5	0.88	76.51
	501	68,202	13	68,962.5	1.12	293.56	70,800.0	3.81	775.82	67,684	-0.76	13	67914.8	-0.42	150.78
	751	122,587	21	124,711.0	1.73	858.91	125,859.0	2.67	1740.60	122,179	-0.33	22	123753.9	0.95	771.56
pr1002	25	16,221	1	16,221.0	0	1.75	16,221.0	0	0.21	16,221	0	1	16221	0	0.28
	51	47,905	3	47,989.0	0.18	4.60	47,980.6	0.16	1.20	47,129	-1.62	2	47293.5	-1.28	3.64
	75	64,102	4	64,889.0	1.23	11.94	65,197.8	1.71	7.49	63,869	-0.36	4	63960.4	-0.22	8.98
	101	87,700	5	88,260.8	0.64	13.78	88,373.9	0.77	7.65	87,692	-0.01	5	87717.8	0.02	19.01
	251	257,198	8	263,657.4	2.51	60.59	264,251.3	2.74	157.55	254,460	-1.06	8	256864.3	-0.13	10.12
	501	597,464	14	611,917.4	2.42	396.32	620,169.5	3.8	776.39	595,095	-0.4	15	599562.1	0.35	297.45
	751	1,008,027	19	1,031,423.3	2.32	1045.75	1,034,424.5	2.62	1723.79	1,000,604	-0.74	20	1017101.2	0.9	375.67
avg	250.71	174422.21	6.40	177923.54	1.27	316.56	179942.44	2.27	568.57	173641.83	-0.39	6.45	174960.23	0.26	243.41
#better															29
#equal															2
#worse															11

In view of its good performance, we further compare LMA with the eight heuristic algorithms for PDPLD instances in [Cheang et al. \(2012\)](#). As shown in Table 4, the first two columns present the instance identifiers and the number of the request vertices, respectively. The following two columns report the best objective value f_{best} , and the number of the vehicles Veh corresponding to the best known solution (BKS) found by the eight heuristics denoted as BKS , including a VNS algorithm, six reduced versions of the VNS heuristic, and the PTS algorithm for PDPLD in [Cheang et al. \(2012\)](#). We present the average results of the objective value f_{avg} , the gap of f_{avg} value to the BKS value in percentage (%), and computing time $Time$ obtained by the VNS and PTS algorithms in ten executions in columns 5-10. The last six columns show that LMA obtains better results for 29 out of 42 instances, matches the current best-known results for 2 instances, and is slightly worse than MS-ITS for 11 instances. However, considering the very small differences between our best results f_{best} and the best-known results reported in [Cheang et al. \(2012\)](#), it is likely that the differences are caused by round-off errors. In addition, LMA outperforms VNS and PTS in terms of the average objective value, the average gap and the average computing time for most tested instances.

To summarize, the results of the above extensive computational studies demonstrate the efficacy of LMA in tackling PDPLT in terms of both solution quality and computational efficiency.

5. Analysis and Discussions

In this section we analyze two key components and one important parameter of LMA, including the hybrid initial solution (HIS) method, the learning-based mechanism to manage the neighbourhood moves, and the parameter δ for the goodness score, with a view to understanding their impacts on the performance of LMA.

5.1. Comparisons between the hybrid initial solution method and the previous construction methods

To study the effectiveness of the proposed HIS method, we compare it with the two effective reference methods, namely random solution with consecutive pickups and deliveries (RCPD), and random solution with pickups before deliveries (RPBD), proposed in [Benavent et al. \(2015\)](#) for PDPLT. Since all the initial solution generation methods only run within a very short time (in fact, less than one second) for all the benchmark instances, we ignore the comparison in terms of computing time. We performed ten runs of each method to solve each instance and recorded the best objective value (minimum duration) and the corresponding number of vehicles. Table 5 and

Table 5: Comparisons of HIS with RCDP and RDPD on public benchmark PDPLT instances.

Instances Set	RCPD			RPBD			HIS		
	f_{best}	f_{avg}	V_{avg}	f_{best}	f_{avg}	V_{avg}	f_{best}	f_{avg}	V_{avg}
lc1	11666.49	11954.37	10	12992.87	13245.64	12	10126.75	10201.19	9
lc2	12191.51	12330.29	4	13329.51	14019.83	5	10738.37	10894.22	4
lr1	3662.08	3844.15	19	4196.58	4321.40	23	2553.86	2778.01	12
lr2	4083.73	4308.95	4	4527.36	4742.02	5	2891.91	2996.54	3
lrc1	4415.38	4764.21	22	4957.51	5119.48	28	2836.88	3008.18	13
lrc2	5007.25	5214.66	5	5556.38	5794.76	6	3318.75	3428.90	4
LC1	61759.62	67891.54	46	76303.72	80432.01	58	44253.90	47812.32	32
LC2	59966.55	65048.99	17	70925.37	74501.11	20	44595.98	48676.67	13
LR1	31547.26	35674.50	43	41113.11	46487.24	61	13548.62	15998.56	18
LR2	34561.74	37529.64	11	43408.86	48645.30	14	17700.74	19741.52	6
LRC1	31231.48	35671.47	46	42537.10	45789.69	68	12493.77	13987.12	17
LRC2	34043.98	38485.91	11	46199.36	49975.54	16	16365.12	17895.55	5
avg	24511.42	26893.22	19.83	30503.98	32756.17	26.33	15118.72	16451.56	11.33
#better							12		
#equal							0		
#worse							0		

Figure 6 present the comparisons of the HIS method with the RCDP and RPBD methods on different classes of instances. Table 5 presents for each instance set its name, the average results in terms of the best objective value f_{best} and the average objective value f_{avg} for each instance set, and the

average number of vehicles V_{avg} corresponding to the best solution, which is rounded to an integer. Figure 6 graphically shows the comparisons of HIS with RCDP and RPBD, where the horizontal axis denotes the sets of instances, and the vertical axis denotes the total duration and the number of vehicles, respectively.


From Table 5 and Figure 6, we observe that HIS is able to obtain better results than RCDP and RPBD in terms of the best objective value and the corresponding number of vehicles. As the size of the instances becomes larger, the advantage of LMA becomes more evident. In sum, HIS is a very effective initial solution generation method for PDPLT.

5.2. Analysis of the learning-based mechanism


To highlight the importance of the learning-based mechanism in LMA, we carried out the following computational studies. We use LMA and WLMA to denote the learning-based memetic algorithm and the memetic algorithm without the learning mechanism, respectively. In other words, under WLMA, the neighbourhood moves are chosen in a token-ring fashion (i.e., N_1, \dots, N_6) with the same fixed probability without the learning-based reward and punishment strategy, while other ingredients are kept unchanged.

We independently solved each instance for ten times by using LMA and WLMA. We report the computational results in Table 6, which shows the average result in terms of the best objective value and average objective value, f_{best} and f_{avg} , respectively, in each instance set, and the average computing time per successful run, i.e., $Time$, where we indicate the best objective values between the two algorithms in bold.

Table 6 shows that when the learning-based mechanism is used, LMA outperforms WLMA on all the public benchmark instances. In particular, in terms of the best and average objective values, LMA obtains better values than WLMA for all the tested instances, as illustrated by WLMA's 66473.22

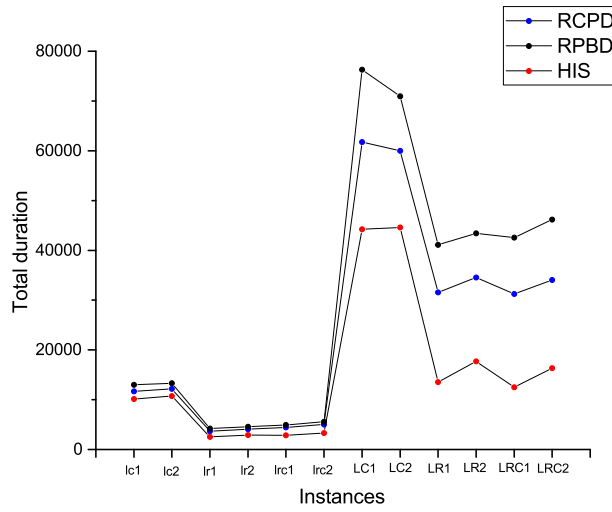

(a)

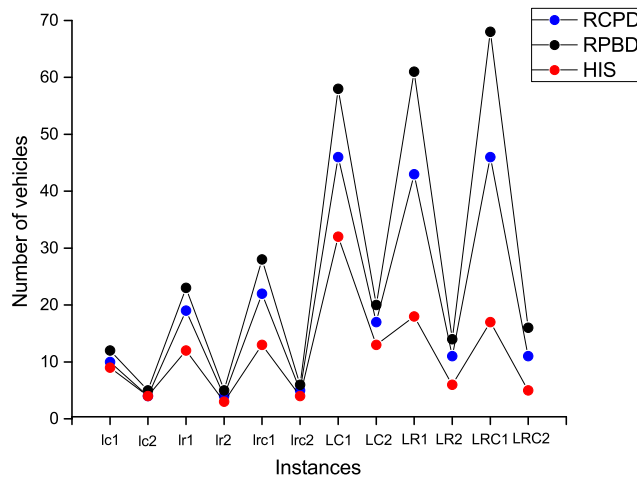

(b)

Figure 6: Comparative results of HIS with RCPD and RPBD in terms of (a)average total duration (b)the corresponding number of vehicles, respectively.

and 67290.66 versus LMA’s 66241.09 and 66757.84. As for the average running time, the two algorithms are very close to each other, i.e., WLMA’s 223.81 versus LMA’s 198.48. Specifically, LMA takes shorter (longer) average computing times to reach the average best results on 13 (5) sets of the tested instances, respectively, compared with WLMA.

Table 6: Comparison of the memetic algorithms with and without the learning-based mechanism on public benchmark PDPLT and PDPLD instances.

Instances Set	WLMA			LMA		
	f_{best}	f_{avg}	Time	f_{best}	f_{avg}	Time
lc1	9863.21	9865.69	20.59	9862.57	9862.93	23.37
lc2	9834.25	9842.23	17.72	9834.01	9834.40	17.84
lr1	2117.58	2136.90	29.54	2113.59	2121.18	30.80
lr2	2085.46	2315.71	35.14	2082.07	2288.05	33.25
lrc1	2246.18	2304.58	27.09	2240.07	2251.93	25.69
lrc2	2210.52	2227.36	20.11	2190.81	2212.35	23.10
LC1	42390.90	42551.95	385.68	42375.73	42420.45	360.08
LC2	40972.84	41056.29	312.42	40772.57	40868.81	300.34
LR1	9715.79	9801.76	323.63	9582.16	9788.584	338.38
LR2	11788.35	12183.44	281.18	10822.59	11178.55	260.46
LRC1	9210.61	9431.28	360.73	9030.575	9141.71	348.02
LRC2	9712.52	10233.04	345.24	9584.18	9920.77	324.52
brd14051	30510.23	30719.17	345.24	30487.29	30711.20	143.43
d15112	611889.62	619696.93	187.57	611571.29	614512.51	198.01
d18512	30384.21	30890.80	589.35	30175.29	30708.19	532.69
fnl4461	39077.55	40018.72	305.10	38942.86	39422.04	352.65
nrv1379	35723.52	36001.26	206.96	35662.00	36012.01	149.56
pr1002	296784.67	299954.69	235.22	295010.00	298385.43	110.43
avg	66473.22	67290.66	223.81	66241.09	66757.84	198.48
<i>#better</i>				18		
<i>#equal</i>				0		
<i>#worse</i>				0		

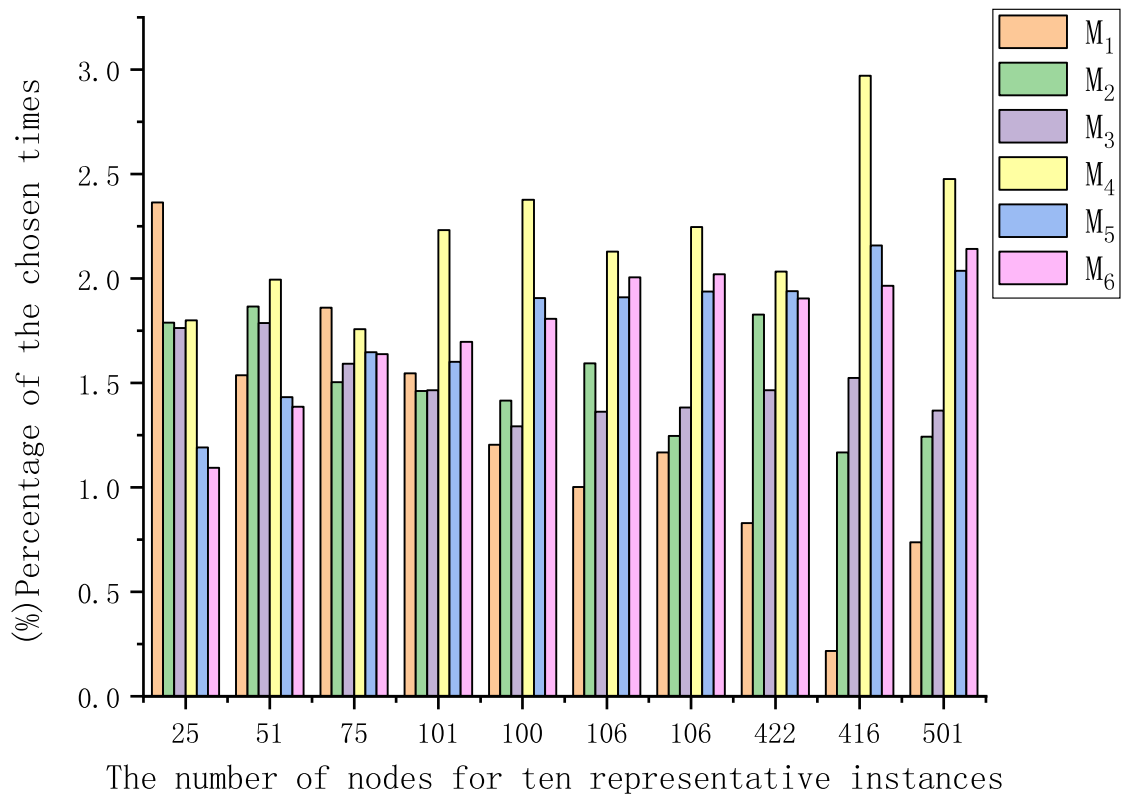


Figure 7: Percentage of the chosen times for six neighborhood moves in LMA

In order to further study the characteristics of the learning mechanism. We obtain the percentage of the chosen times for six neighborhood moves during the search of LMA for ten representative instances with different scales². We run each instance once with the maximum time limit of 360 seconds by using LMA. Figure 7 shows the experimental results for the percentage of the chosen moves for all the six neighborhood moves in LMA. The probability of choosing small moves with no more than two requests (such as M_1 and M_2) clearly decreases as the size of the instances increases (for sizes ranging from 25 to 501). In contrast, the probability of choosing large moves based on components (such as M_4 , M_5 and M_6) significantly increases. One can clearly observe that the large moves are preferred in the large scale instances. In general, the probability of each move being selected varies for different instances, which are significantly different from the token-ring fashion for WLMA (with the same probability for each move) verifying the impact of our proposed learning mechanism.

The above results indicate that our learning-based mechanism plays a crucial role in boosting the performance of LMA in solving PDPLT.

5.3. Importance of the parameter δ

The LCS-based population updating strategy considers both solution quality and the distances between solutions and the population in updating the search. The parameter δ is used to balance these two factors in order to achieve a better trade-off between intensification and diversification of the search. In order to ascertain the importance of δ in LMA, we conducted the following computational studies. Specifically, we selected eight representative sets of instances with different scales of the benchmark instances, namely lc2, lr2, lrc2, LC2, LR2, LRC2, fn14461 and pr1002. Taking into account the

²Ten representative instances consists of brd14051_25, d15112_51, d18512_75, fn14461_101, lc101, lr101, nrw1379_251, LC1.4.1, LR1.4.1, and pr1002_501.

randomness of the algorithm, we ran it ten times for each parameter setting $(0, 0.1, \dots, 1.0)$. Figure 8 presents the average results over all the tested instances, where the horizontal axis denotes the value of the parameter δ and the vertical axis denotes the computing time and the objective values normalized by the following normalized function:

$$\theta(z) = \frac{z - z_{min}}{z_{max} - z_{min}}. \quad (8)$$

Figure 8 shows the trajectories of the computing time and objective value over different δ values. When δ is equal to 1, which gives all the weight to the objective value and none to the population distance, the corresponding

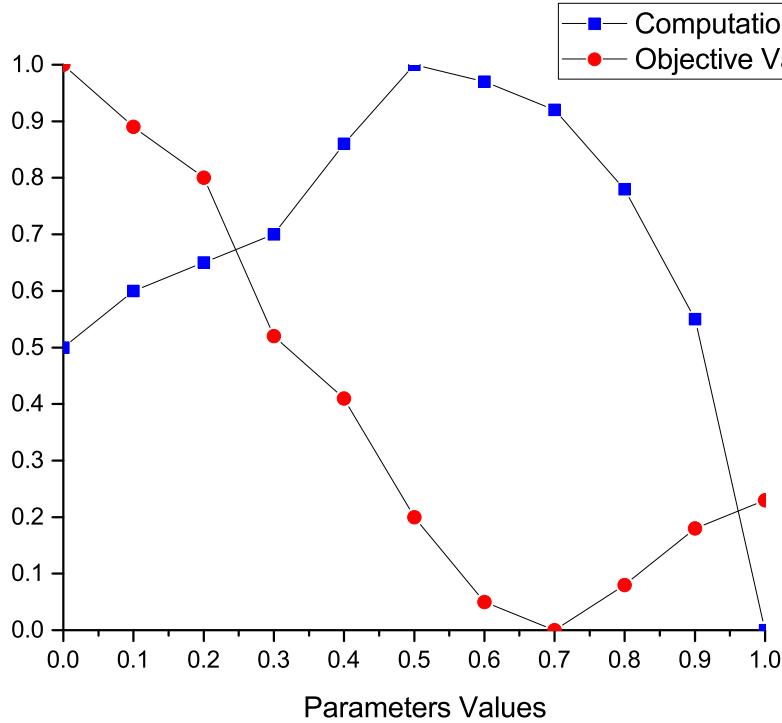


Figure 8: The effect of the parameter δ

algorithm is the fastest but cannot find high-quality solutions because the algorithm does not consider the diversity of the population, while the algorithm can obtain the best values with δ set at 0.6 to 0.8. The results demonstrate that premature convergence of the algorithm can be avoided by employing the LCS-based population updating strategy. We further observe that the best-performing parameter values are the same as the best parameter values analyzed in Figure 5.

6. Conclusion

Our learning-based memetic algorithm LMA for the pickup and delivery problem under the LIFO loading policy demonstrates the effectiveness of its key features, which include a hybrid initial solution construction method, a learning-based local search procedure, a component-based crossover operator utilizing the ideas of structured combinations, and a longest-common-subsequence-based population updating strategy.

Experimental evaluations on two sets of public benchmark instances show that our LMA performs very favourably compared to the current state-of-the-art reference algorithm MS-ITS (Benavent et al., 2015) and the eight heuristics including a VNS algorithm, its six reduced versions, and PTS for PDPLD proposed in Cheang et al. (2012). In particular, LMA is able to obtain highly competitive results in terms of both computational efficiency and solution quality for most of the PDPLT and PDPLD instances, improving the best-known results for 132 out of 158 of the tested problem instances, while matching the best-known results for all but three of the remaining instances. In addition, our computational studies demonstrate the effectiveness of the key strategies incorporated into our proposed LMA.

These outcomes motivate future research to extend our work in the following directions: First, it would be interesting to employ a powerful tabu search method (such as granular tabu search) to improve the search capa-

bility of the learning-based local search phase. Second, the design of our approach invites the development of related procedures that combine its strategies with those of other population-based frameworks like path-relinking (Glover et al., 2000) should be very promising. Finally, the success of these ideas for tackling the PDPLT problem suggests that it would be worthwhile to test their performance in dealing with other variants of the vehicle routing problem.

Acknowledgments

This research was supported in part by the National Natural Science Foundation of China under grant numbers 71320107001, 61370183, 71871184, and the Programme for New Century Excellent Talents in Universities (NCET 2013).

References

- Azadian, F., Murat, A., Chinnam, R. B., 2017. An unpaired pickup and delivery problem with time dependent assignment costs: Application in air cargo transportation. *European Journal of Operational Research* 263 (1), 188–202.
- Azi, N., Gendreau, M., Potvin, J.-Y., 2014. An adaptive large neighborhood search for a vehicle routing problem with multiple routes. *Computers & Operations Research* 41, 167–173.
- Benavent, E., Landete, M., Mota, E., Tirado, G., 2015. The multiple vehicle pickup and delivery problem with LIFO constraints. *European Journal of Operational Research* 243 (3), 752–762.
- Benlic, U., Hao, J. K., 2015. Memetic search for the quadratic assignment problem. *Expert Systems with Applications* 42 (1), 584–595.

- Birattari, M., Yuan, Z., Balaprakash, P., Stützle, T., 2010. F-race and iterated f-race: An overview.
- Carrabs, F., Cerulli, R., Cordeau, J.-F., 2007. An additive branch-and-bound algorithm for the pickup and delivery traveling salesman problem with LIFO or FIFO loading. *INFOR: Information Systems and Operational Research* 45 (4), 223–238.
- Chami, Z. A., Manier, H., Manier, M. A., 2017. A lexicographic approach for the bi-objective selective pickup and delivery problem with time windows and paired demands. *Annals of Operations Research* (2), 1–19.
- Cheang, B., Gao, X., Lim, A., Qin, H., Zhu, W., 2012. Multiple pickup and delivery traveling salesman problem with last-in-first-out loading and distance constraints. *European Journal of Operational Research* 223 (1), 60–75.
- Chen, Y., Hao, J. K., Glover, F., 2016. A hybrid metaheuristic approach for the capacitated arc routing problem. *European Journal of Operational Research* 253 (1), 25–39.
- Cheng, T. C. E., Peng, B., L, Z., 2016. A hybrid evolutionary algorithm to solve the job shop scheduling problem. *Annals of Operations Research* 242 (2), 223–237.
- Cherkesly, M., Desaulniers, G., Laporte, G., 2015. A population-based metaheuristic for the pickup and delivery problem with time windows and LIFO loading. *Computers & Operations Research* 62, 23–35.
- Cordeau, J. F., DellAmico, M., Iori, M., 2010a. Branch-and-cut for the pickup and delivery traveling salesman problem with FIFO loading. *Computers & Operations Research* 37 (5), 970–980.

- Cordeau, J. F., Iori, M., Laporte, G., Salazar González, J. J., 2010b. A branch-and-cut algorithm for the pickup and delivery traveling salesman problem with LIFO loading. *Networks* 55 (1), 46–59.
- Erdoğan, G., Cordeau, J.-F., Laporte, G., 2009. The pickup and delivery traveling salesman problem with first-in-first-out loading. *Computers & Operations Research* 36 (6), 1800–1808.
- Escobar, J. W., Linfati, R., Toth, P., Baldoquin, M. G., 2014. A hybrid granular tabu search algorithm for the multi-depot vehicle routing problem. *Journal of Heuristics* 20 (5), 483–509.
- Furtado, M. G. S., Munari, P., Morabito, R., 2017. Pickup and delivery problem with time windows: A new compact two-index formulation. *Operations Research Letters* 45 (4), 334–341.
- Glover, F., 1994. Tabu search for nonlinear and parametric optimization (with links to genetic algorithms). *Discrete Applied Mathematics* 49 (1-3), 231–255.
- Glover, F., Laguna, M., Marti, R., 2000. Fundamentals of scatter search and path relinking. *Control and Cybernetics* 29 (3), 653–684.
- Helsgaun, K., 2000. An effective implementation of the Lin–Kernighan traveling salesman heuristic. *European Journal of Operational Research* 126 (1), 106–130.
- Li, H., Lim, A., 2003. A metaheuristic for the pickup and delivery problem with time windows. *International Journal on Artificial Intelligence Tools* 12 (02), 173–186.
- Li, Y., Lim, A., Oon, W. C., Qin, H., Tu, D., 2011. The tree representation for the pickup and delivery traveling salesman problem with LIFO loading. *European Journal of Operational Research* 212 (3), 482–496.

- Lopez-Ibanez, M., Dubois Lacoste, J., Caceres, L. P., Birattari, M., Stützle, T., 2016. The irace package: Iterated racing for automatic algorithm configuration. *Operations Research Perspectives* 3, 43–58.
- Lu, Y., Benlic, U., Wu, Q., 2018. Multi-restart iterative search for the pickup and delivery traveling salesman problem with FIFO loading. *Computers & Operations Research*.
- Montero, A., Miranda-Bront, J. J., Mndez-Daz, I., 2017. An ILP-based local search procedure for the VRP with pickups and deliveries. *Annals of Operations Research* 259 (1-2), 327–350.
- Naccache, S., Cote, J. F., Coelho, L. C., 2018. The multi-pickup and delivery problem with time windows. *European Journal of Operational Research* 269.
- Pavone, M., 2013. Asymptotically optimal algorithms for one-to-one pickup and delivery problems with applications to transportation systems. *IEEE Transactions on Automatic Control* 58 (9), 2261–2276.
- Reinelt, G., 1991. TSPLIB—A traveling salesman problem library. *ORSA Journal on Computing* 3 (3), 376–384.
- Veenstra, M., Cherkesly, M., Desaulniers, G., Laporte, G., 2017. The pickup and delivery problem with time windows and handling operations. *Computers & Operations Research* 77 (7), 127–140.
- Yu, Y., Tang, J., Li, J., Sun, W., Wang, J., 2016. Reducing carbon emission of pickup and delivery using integrated scheduling. *Transportation Research Part D Transport & Environment* 47, 237–250.